



Attachments

Content

HD Bucket.....	3
Levelling bucket.....	4
Light material bucket.....	5
Universal bucket.....	6
Leveller.....	7
Leveller HD.....	8
Pallet fork.....	9
Large bag lift.....	10
Rock grapple.....	11
Digging equipment mini.....	12
Buckets.....	13
Trencher.....	14
Ground auger.....	15
Dosing feeder.....	16
Matrix, asphalt bucket.....	17
Trailer, 3-way tip.....	18
Tilt adapter.....	19
Snowblower 1200 G.....	20
Snowblower 1500 P.....	21
Brush unit.....	22
Brush without collector.....	23
Brush round.....	24
Push broom.....	25
High pressure washer.....	26
Snow blade.....	27
Folding V-blade plough.....	28
Sand spreader.....	29
Lawn mower.....	30
Cultivator.....	31
Flail shredder.....	32
Stump grinder.....	33
Wood chipper.....	34
Bale spear.....	35
Round bale speare.....	36
Silage fork.....	37
Grapple bucket.....	38
Grapple bucket.....	39
Silage fork.....	40
Round bale grab.....	41
Horse arena grader.....	42

Symbols for different attachments



EXTRA HYDRAULIC OUTLET FRONT



OIL COOLER



HIGH CAPACITY HYDRAULICS



HYDRAULIC OUTLET REAR



OSCILLATION LOCK



REAR WEIGHT



FRONT WEIGHT



ELECTRIC OUTLET ON THE LIFTING BOOM



TRACTION CONTROL



FULL TRACTION CONTROL



SEAT ROTATION



REVERSE SIGNAL



TELESCOPIC BOOM



SELF LEVELLING

The compatibility of attachments for the a7240 is the same as the previous models a7236 and a7545.

The Norcar Multi Faster -hydraulic coupling.



Very compatible



Compatible

HD Bucket



HD buckets are customized and designed for demanding use. The design and volume of the HD bucket is made to get a safe use even with heavy material on respective Norcar loader modell. Taking in consideration their tipping load value.

The buckets have a 12 mm thick cutting edge and 10 mm reinforcement plates underneath the bucket.

The HD buckets configuration with bent side plates and with a draft angle towards the rear wall of the bucket makes its penetration capabilities very good even in rough and heavy materials.



	8000248	8000069	8000070	8000253
Width (cm)	90	105	120	140
Height (cm)	42	42	50	55
Lenght (cm)	57	57	64	74
Weight (kg)	76	60	88	128
Volume (l)	100	120	240	340

8000248	755xc	a6020	a6026	a6226	a7240	a7750
8000069	755xc	a6020	a6026	a6226	a7240	a7750
8000070	755xc	a6020	a6026	a6226	a7240	a7750
8000253	755xc	a6020	a6026	a6226	a7240	a7750

Levelling bucket



Heavy duty levelling bucket. Low rise design and a long bottom gives excellent visibility to the front edge of the bucket. The bucket has a 12 mm thick cutting edge in both the front and the rear which provides efficient levelling and cutting even in tougher materials.



	8000501	8000502
Width (cm)	120	150
Height (cm)	47,5	47,5
Length (cm)	105,5	105,5
Weight(kg)	150	175
Volume (l)	300	390

The bottom is reinforced with wear plates.
Optimized for maximal breakout force and tilt angle.
Cutting edge 500HB

8000501	755xc	a6020	a6026	a6226	a7240	a7750
8000091	755xc	a6020	a6026	a6226	a7240	a7750

Light material bucket



A bucket with great volume customized for lighter materials such as snow, soil, peat or wood chips. The buckets configuration with bent side plates and a draft angle towards the rear wall of the bucket guarantees a simple and complete emptying of the bucket with all kind of materials. The high upper edge of the bucket does that transported material doesn't fall backwards. The reinforced cutting edge on the bucket can handle very tough handling.



	8000090	8000091	8000254
Width (cm)	105	120	150
Height (cm)	58	67	71
Lenght (cm)	70	85	88
Weight (kg)	105	105	128
Volume (l)	240	430	620

8000090	755xc	a6020	a6026	a6226	a7240	a7750
8000091	755xc	a6020	a6026	a6226	a7240	a7750
8000254	755xc	a6020	a6026	a6226	a7240	a7750

Universal bucket



A 4 in 1 bucket is suitable for most tasks, it can be opened and closed hydraulically and used for many different tasks such as gripping stones, bulldozing, clam loading, bottom dumping, bucket, etc. The front of the bucket opens up with the help of 2 double acting hydraulic cylinders that is mounted on the back side of the bucket. One advantage with the bucket is the it opens in the bottom meaning you can unload the bucket at a higher point compared to if you would be tipping it. It's a versatile bucket that can be used for many different tasks!



Norcar Multi Faster -hydraulic coupling is standard.



	870179	870133
Width (cm)	108	125
Height (cm)	57	57
Weight (kg)	171	210
Volume (l)	135	156
Opening width (cm)	50	50

870179	755xc	a6020	a6026	a6226	a7240	a7750
870133	755xc	a6020	a6026	a6226	a7240	a7750

Leveller



The leveller is developed for levelling of driveways, parking areas, etc and is an effective tool when you are planting a new lawn or making a brick driveway. The attachment can also be used for transporting material or tools to the work place. The attachment is equipped with loading points for easy transport.

8000251

Width (cm)	120
Weight (kg)	77
Height (cm)	38
Length (cm)	111
Working width (cm)	120

755xc a6020 a6026 a6226 a7236 a7240 a7750

Leveller HD



Landplane HD is an efficient and powerful attachment for grading and levelling before putting in lawns, gravel isles and preparing for brick isles and drive-ways. It grades, levels in both forward and reverse, peels and removes earth. It can even carry material like a bucket. The deluxe landplane includes a removable screen to pulverize soil lumps, aerate and sort debris from the soil.



	8000233	8000249
Width (cm)	120	150
Weight (kg)	115	135
Height (cm)	41	41
Lenght (cm)	100	100

8000233	755xc	a6020	a6026	a6226	a7240	a7750
8000249	755xc	a6020	a6026	a6226	a7240	a7750

Pallet fork



The forks are manufactured in high tensile forged steel. The adjustment of the forks is easy thanks to the quick lock mechanism. The pallet forks are suitable for lifting and handling of different types of materials on pallets.



8000005

Width (cm)	100
Weight (kg)	120
Height (cm)	55
Lenght (cm)	114
Fork lenght (cm)	100

755xc a6020 a6026 a6226 a7240 a7750

Large bag lift



An easy way of handling big bags. Is very suitable for lifting big grain, fertilizer or seed bags.



8000375

Width (cm)	94
Weight (kg)	46
Length (cm)	150
Lifting height (cm)	132
Max lifting capacity (kg)	1000



755xc a6020 a6026 a6226 a7236 a7240 a7750

Rock grapple



The stone collecting bucket is intended mainly for collecting stones from the fields after the field has been harrowed. The bucket is equipped with strong and durable tines.



8000396

Width (cm)	150
Weight (kg)	263
Height (cm)	60
Length (cm)	100
Diameter of tine (mm)	35
Distance between tines (mm)	80

755xc a6020 a6026 a6226 a7236 a7240 a7750

Digging equipment mini



Effective and economical solution for smaller excavating jobs. The mini digger is mounted straight on the attachment plate on the loader. It is light and easy to transport.


Norcar Multi Faster -hydraulic coupling is standard.

870159

Weight (kg)	73
Max digging depth (cm).....	208
Length (cm).....	178
Length without bucket (cm)	130
Attachment plate.....	Norcar

755xc	a6020	a6026	a6226	a7240	a7750
-------	-------	-------	-------	-------	-------

Buckets

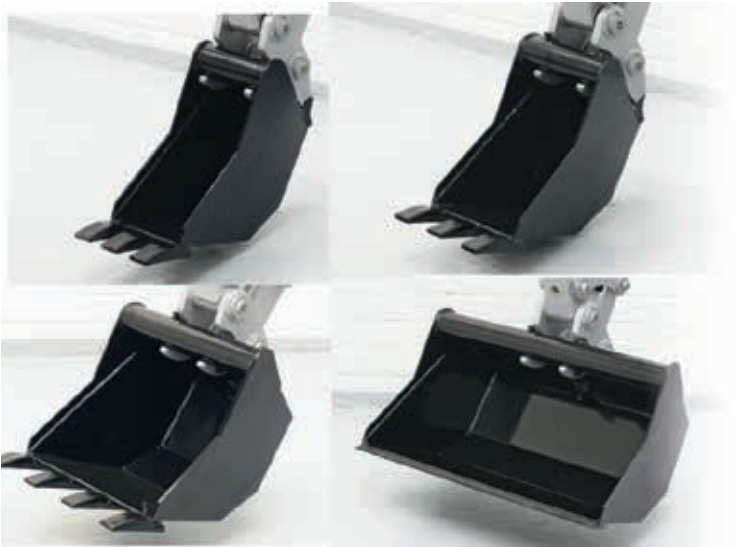

A large selection of buckets for different tasks suits the mini digger (870159).

With teeth	870163	870164	870166
Width (cm)	20	27	37
Weight (kg)	20	22	25
Volume (l)	12	16	24
Without teeth	870167	870172	
Width (cm)	47	80	
Weight (kg)	31	45	
Volume (l)	30	55	

Trencher



With the trencher you easily dig narrow trenches without damaging the ground in the digging area. It's a fast way to dig trenches for pipes or cables. The trencher does a clean trench which can easily be filled with a bucket or a blade. The trencher is driven by a hydraulic motor via a planetary drive to ensure a long and trouble-free operation.

Norcar Multi Faster -hydraulic coupling is standard.



870159

Width (cm)	107
Weight (kg)	210
Lenght (cm)	174
Trench width (cm)	10-30
Trench depth (cm)	90
Attachment plate	Norcar



755xc	a6020	a6026	a6226	a7240	a7750
-------	-------	-------	-------	-------	-------

Ground auger



A hydraulic motor with a planetary drive gives you a high torque and makes the auger unit very efficient in many tasks. A large selection of different size augers makes it possible to drill holes from 75-900mm. To auger in hard ground conditions is made possible thanks to the replaceable tungsten teeth and pilot head.

Norcar Multi Faster -hydraulic coupling is standard.

Auger extension pipe :	
870380	500 mm
870381	800 mm
870382	1000 mm

Auger:	
870366	D 100 mm (MFT)
870367	D 150 mm (MFT)
870368	D 200 mm (MFT)
870369	D 300 mm (MFT)
870370	D 400 mm (MFT)
870371	D 500 mm (MFT)
870372	D 600 mm (MFT)

870350

Weight (kg)	72
Lenght (cm).....	65
Auger diameter (cm).....	10, 15, 20, 30, 40, 50, 60
Auger lenght (cm).....	97, 97, 97, 97, 87, 87, 87
Auger weight (kg)	13, 15, 25, 37, 43, 50, 58
Auger extension pipe (cm).....	50, 80, 100

755xc	a6020	a6026	a6226	a7236	a7240	a7750
-------	-------	-------	-------	-------	-------	-------

Dosing feeder



The dosing feeder is shaped like a bucket for easy filling of different materials. The auger in the bottom distributes the material smoothly and evenly. An attachment that is suitable for filling cable or pipe trenches. It can even be used for distributing animal feed. Suited for sand, finer gravel and flour.

Norcar Multi Faster -hydraulic coupling is standard.



870180

Width (cm)	94
Weight (kg)	98
Height (cm)	80
Lenght (cm).....	81
Volume (l).....	250
Attachment plate.....	Norcar

755xc	a6020	a6026	a6226	a7240	a7750
-------	-------	-------	-------	-------	-------

Matrix, asphalt bucket



For smaller asphalt paving areas. The height of the asphalt layer can be adjusted manually. Also works well when distributing an even base for laying a brick or stone driveway.

870200

Width (cm).....	100
Weight (kg).....	250
Height (cm).....	90
Length (cm).....	70
Volume (l).....	250



755xc a6020 a6026 a6226 a7236 a7240 a7750

Trailer, 3-way tip



Powerful and versatile trailer with a 3-way tip. The direction of tipping is easily changed by moving the hinge pins placement. Equipped with foldable 35 cm high side walls that can be removed if necessary which opens a totally flat and even bed. The trailer has a very strong frame and a height adjustable trailer coupler.

The loader needs to be equipped with a rear hydraulic outlet and trailer hitch.



870156

Width (cm):	128
Weight (kg):	452
Lenght (cm):	279
Height, side walls (cm):	35
Loading height (cm):	70
Loading capacity (kg):	1500
Loading area (cm):	110*200
Maximum height (cm):	140
Overhang (cm):	60



755xc a6020 a6026 a6226 a7236 a7240 a7750

Tilt adapter



Norcar tilt adapter is mounted between the attachment plate and the attachment. The adapter is very compact and supple and makes it possible to tilt an attachment 15 degrees in both directions.

The tilt adapter gives you great advantages when for example doing leveling work when you can tilt the bucket or leveler to follow the surface. The tilt adapter in combination with pallet forks also gives good possibilities to adjust the load when you are driving on uneven surfaces. To pick up a pallet that is tilted is easily done.

With the tilt adapter in combination with hydraulic attachments the loader needs to be equipped with extra hydraulic outlet front 4,5 (only for a-series loaders)

The tilt adapter is equipped with a flow regulation valve which makes it possible to adjust the speed of the tilt adapters movement.



8000442

Outlet Multifaster
(a- och 700 series)



8000443

Outlet 4 & 5
(a- series)

8000342

Weight (kg)	51
Tilt angle (°).....	+/- 15°
Torque (kNm)	7-9,49
External dimensions (mm).....	105

In the tilt adapter 8000342 there are no hydraulic hoses included. These must be ordered separately depending which loader model the tilt adapter is intended for and which hydraulic outlet.

755xc

a6020

a6026

a6226

a7240

a7750

Snowblower 1200 G



Effective and durable two-stage snowblower

Norcar snow blowers are equipped with hydraulic controls for discharge chute rotation and throwing angle.

Control of the attachment requires the loader to be equipped with a 4 and 5 hydraulic function.

A control panel for alternating between rotation and throwing angle is included. This can be controlled directly from the joystick with the 4.5 hydraulic control keys, and the functions are alternated from the panel.

- Two-stage snowblower
- Intake height 700 mm
- Reinforced frame
- Driven by hydraulic gerotor motor
- Norcar mounting plate
- Cast iron gearbox
- 400 mm auger with ice breaker
- 400 mm second stage impeller
- Hydraulic chute rotation
- Hydraulic chute deflector adjustment

Norcar Multi Faster -hydraulic coupling is standard.

8000535

Width (mm).....	1200
Weight (kg)	220
Capacity (l/min).....	40/60

a6226 a7236 a7240 a7750

Snowblower 1500 P



Norcar snow blowers are equipped with hydraulic controls for discharge chute rotation and throwing angle.

Control of the attachment requires the loader to be equipped with a 4.5 hydraulic function.

A control panel for alternating between rotation and throwing angle is included. This can be controlled directly from the joystick with the 4.5 hydraulic control keys, and the functions are alternated from the panel.

Norcar Multi Faster -hydraulic coupling is standard.

- Two-stage snowblower
- Intake height 700mm
- Reinforced frame
- Driven by axial piston engine
- Norcar mounting plate
- Cast iron gearbox
- 400mm auger with ice braker
- 400mm second stage impeller
- Hydraulic chute rotation
- Hydraulic chute deflector adjustment

8000536

Width (mm)	1500
Weight (kg)	270
Capacity (l/min)	55/80

a6026 a6226 a7240 a7750

Brush unit



A versatile brush unit that can be equipped with a collector, a lateral brush and a water system. Draining of the unit is done with the hydraulics. Three reinforced wheels for smooth driving.

- collector, 6003464
- lateral brush, 6003465
- water system, 6003466

Norcar Multi Faster -hydraulic coupling is standard.



8000590

Widht (cm)	185
Working width (cm)	150
Brush diameter (cm)	52
Weight (kg)	194
Volume (l)	135

755xc a6020 a6026 a6226 a7236 a7240 a7750

Brush without collector



Robust broom with floating mechanism and mechanical turning.

Norcar Multi Faster -hydraulic coupling is standard.

870125

Width (cm):	134
Weight (kg):	215
Height (cm):	82
Lenght (cm):	110
Working width (cm):	120
Broom diameter (cm):	50
Turning radius:	+/- 30°



- 755xc
- a6020
- a6026
- a6226
- a7240
- a7750

Brush round, plastic+steel



The circular broom is an efficient broom that moves the material sideways. It is a useful attachment when sweeping materials to the side or away from the wall. It rotates in both directions and can be used for various tasks.

Norcar Multi Faster -hydraulic coupling is standard.

Brush, plastic



	870252	870253
Width (cm):	105	105
Weight (kg):	82	78
Height (cm):	44	44
Lenght (cm):	125	125
Broom material:	Plastic + Steel	Plastic

870252	755xc	a6020	a6026	a6226	a7240	a7750
870253	755xc	a6020	a6026	a6226	a7240	a7750

Push broom



8 rows polypropylene brush for use on snow, dirt and sand. Built in support stand for easy storage and maintenance. Replace of brush rows made really easy.



	8000562	8000563
Width (cm)	164	214
Working width (cm).....	150	200
Weight (kg)	106	135
Height (cm)	55	55
Brush rows.....	8	8
Brush lenght (cm).....	25,5	25,5

8000562	755xc	a6020	a6026	a6226	a7240	a7750
8000563	755xc	a6020	a6026	a6226	a7240	a7750

High pressure washer



Equipped with a high-pressure washer it will turn your Norcar loader into a smooth street cleaning machine. The washer handle and 20m of retractable hose makes it easy and efficient to wash your loader or other machinery and equipment. It is also suitable for washing benches, playgrounds, sidewalks, etc. The pressure washer combines low water consumption (30l/min) with high pressure (200bar).

Norcar Multi Faster -hydraulic coupling is standard.



8000505

Weight (kg):	104
Height (cm):	130
Volume (l):	270
Working width (cm):	125
Wash pressure (bar):	200



a6026 a6226 a7240 a7750

Snow blade



Effective tool for removing snow. Stable spring released mechanism with hydraulic turning. The blade has a floating system allowing the blade to float vertically, which makes working on uneven surfaces considerably easier and more efficient. The blade can be equipped with extensions. Comes standard with support plates and reversible wear plates (hardened steel AR500). Extensions 25+25 cm can be mounted in straight or collecting position (only on 8000262).

Norcar Multi Faster -hydraulic coupling is standard.

Extensions



	8000262	8000290
Width (cm):	140	190
Weight (kg):	135	160
Height (cm):	47	47
Lenght (cm):	67	73
Hydraulic rotation:	+/- 28°	+/- 28°

Extensions	8000291
Width (cm):	25 + 25
Weight (kg):	25
Height (cm):	47
Lenght (cm):	13

8000262	755xc	a6020	a6026	a6226	a7240	a7750
8000290	755xc	a6020	a6026	a6226	a7240	a7750
8000291	755xc	a6020	a6026	a6226	a7240	a7750

Folding V-blade plough



Hydraulically adjustable folding V-blade plough that facilitates snow removal along narrow sections. The folding of the plough is engaged easily and smoothly via the loader's joystick. The blade can also be turned horizontally (6°) in order to follow the surface in the best manner. The plough is equipped with corner markers. The hardened steel liner on the V-blade is replaceable. The hydraulic system is protected by an overpressure valve.



Norcar Multi Faster -hydraulic coupling is standard.

8000579

Width (cm)	165
Width angle max.	145
Height (cm)	63
Weight (kg)	137
Steel liner	Hardox 6 mm
Angle max.....	30°

a6020 a6026 a6226 a7236 a7240 a7750

Sand spreader



Efficient attachment for icy or snowy surfaces. Solid design gives the spreader a long-life span. The bucket is driven by the loader's hydraulics and is equipped with a mixer axle to evenly distribute the sand. The bucket is designed so that it can be used with the lifting boom in its lowest position which makes the combination of loader and spreader as short as possible. Spreads Sand, salt and gravel up to 0,9mm in size. The spreader is equipped with support legs for safe keeping when not in use.



Norcar Multi Faster -hydraulic coupling is standard.

8000508

Width (cm):	132
Weight (kg):	233
Height (cm):	73
Length (cm):	86
Volume (l):	280
Attachment plate:	Norcar
Spread width (mm):	1200

755xc a6020 a6026 a6226 a7236 a7240 a7750

Lawn mower



A stable hydraulically driven lawn mower with 3 belt driven rotors. The mover is a mulcher type and with a double cutting edge on each rotor the grass is spread out very effectively.

The mower can also be used as a normal mower with rear discharge or side discharge by removing the guide plates underneath the mower.

The mower has stable 360 degree turning wheels and the cutting height can easily be adjusted.



Norcar Multi Faster -hydraulic coupling is standard.

	8000346	8000347
Width (cm):	131	174
Weight (kg):	170	200
Working width (cm):	120	150



8000346	755xc	a6020	a6026	a6226	a7240	a7750
8000347	755xc	a6226	a7240	a7750		

Cultivator



The rotary tiller has powerful rotors with 4 cutting blades each. The tiller cultivates the soil effectively. Very effective when making grass lawns and gardens.

Norcar Multi Faster -hydraulic coupling is standard.

8000350

Width (cm):117
Weight (kg): 150
Working width (cm): 105



755xc	a6020	a6026	a6226	a7240	a7750
-------	-------	-------	-------	-------	-------

Flail shredder



Intended for cutting long grass, lade configuration scrub, bush and similar vegetation. The flail mower is equipped with Y-knives as standard.

Norcar Multi Faster -hydraulic coupling is standard.

	8000510	8000511
Width (cm):	154	178
Weight (kg):	187	207
Working width (cm):	129	153



8000510	a6226	a7240	a7750
8000511	a6226	a7240	a7750

Stump grinder



The stump grinder is mounted on the loader's attachment plate. The stump grinder has an integrated swing movement.

Norcar Multi Faster -hydraulic coupling is standard.



	870801	870802
Width (cm):	69	80
Weight (kg):	92	200
Height (cm):	58	65
Lenght (cm):	81	124
Hydraulic oil flow (l/min):	30-50	50-75
Maximum pressure :	250	250



870801	a6226	a7240	a7750
870802	a7750		

Wood chipper



Compact and robust wood chipper for chipping wood out of smaller trees and branches with a maximum diameter of 10 cm. The chipping drum has two knives that effectively pulls in and chips the wood material.

Norcar Multi Faster -hydraulic coupling is standard.

8000508

Width (cm):	80
Weight (kg):	210
Height (cm):	150
Length (cm):	120
Number of blades:	2
Chip size (mm):	12
Hydraulic flow (l/min):	30
Wood max. diam. (cm):	10



a6226 a7236 a7240 a7750

Bale spear



Sturdy attachment for handling both square and round bales. It has two high quality spring steel spears with a yield strength of over 1400 MPa. The spears are positioned so that they can also be used as a fork lift, which makes it very useful for handling both bales and pallet material without having to change anything. The attachment has height-adjustable support beams that protect against loads falling backwards.



8000517

Width (mm)	900
Hight (mm)	955-1180
Length (mm)	1180
Weight (kg)	50
Length of spear (mm)	1100
Distance between spears (mm)	750

755xc a6020 a6026 a6226 a7236 a7240 a7750

Round bale spear



Sturdy attachment for handling both square and round bales. It has two high quality spring steel spears with a yield strength of over 1400 MPa. One long spear to securely lift the bale and a shorter one that prevents the bale from rotating. The attachment has height-adjustable support beams that protect against loads falling backwards



8000518

Width (mm).....	900
Hight (mm).....	955-1180
Length (mm).....	1180
Weight (kg).....	50
Spear (qty.).....	2
Length of spear (mm).....	1100 / 600
Distance between spears (mm).....	370

755xc	a6020	a6026	a6226	a7240	a7750
-------	-------	-------	-------	-------	-------

Silage fork



Effective silage fork which is available in two different widths. Equipped with two hydraulic cylinders.

Norcar Multi Faster -hydraulic coupling is standard.

	8000593	8000595
Width (cm)	130	150
Weight (kg)	225	240
Height (cm)	77	77
Lenght (cm)	97	97
Volume (l)	900	1050

8000593	a6020	a6026	a6226	a7240	a7750
8000595	a7240	a7750			

Grapple bucket



Grapple bucket is a combination of bucket and grapple. With the grapple bucket you can transport and load for example branches, wood chips, compost, bedding, manure and construction waste. With the grapple in the upper position it can also be used as a normal bucket. Efficient side plates protect and give more volume to the scoop.

Norcar Multi Faster -hydraulic coupling is standard.

	8000591	8000592
Width (cm):	130	150
Weight (kg):	330	160
Height (cm):	72	72
Lenght (cm):	80	80
Volume (l)	700	800

8000591	a6020	a6026	a6226	a7240	a7750
8000592	a6020	a6026	a6226	a7240	a7750

Grapple bucket



Grapple bucket is a combination of bucket and grapple. With the grapple bucket you can transport and load for example branches, wood chips, compost, bedding, manure and construction waste. With the grapple in the upper position it can also be used as a normal bucket.

Norcar Multi Faster -hydraulic coupling is standard.



8000407

Width (cm):	105
Weight (kg):	147
Volume (l):	120
Gap:	82°

755xc a6020 a6026 a6226 a7240 a7750

Silage fork



Suitable for most feed. A powerful hydraulic cylinder allows you to complete your job effectively. A compact model that also fits in to tight spaces.

Norcar Multi Faster -hydraulic coupling is standard.

Feeding table cleaning blade custom fitted for silage fork 8000287 och 8000036.

Cleaning blade



	8000287	8000036
Width (cm):	90	105
Weight (kg):	106	110
Height (cm):	55	55
Lenght (cm):	77	77
Number of tines:	6	6
Distance between tines (cm):.....	16	19

Feeding table cleaning blade	8000410
Width (cm):	120
Weight (kg):	50
Height (cm):	25
Working width (cm):	125
Working height (cm):	27,5

8000287	755xc	a6020	a6026	a6226	a7240	a7750
8000036	755xc	a6020	a6026	a6226	a7240	a7750

Round bale grab



Large contact surfaces enable you to gently move plastic wrapped round bales. The grab handles round bales with a diameter from 99 cm to 180 cm. Powerful construction, steel blasted and treated with an alkylid paint that guarantees long durability and it's equipped with 2 powerful hydraulic cylinders 63/40-169 mm.

Norcar Multi Faster -hydraulic coupling is standard.



870801

Weight (kg):	235
Bale diameter (mm):	990-1800
Grab pipe diameter (mm):	48
Height (mm):	910

755xc

a6020

a6026

a6226

a7240

a7750

Horse arena grader



Effective tool for levelling and loosening horse arena riding surfaces. The graders blade can be opened and angled backwards and can then be used to move material from the arena walls to the center.



870766

Width (cm):250

755xc

a6020

a6026

a6226

a7240

a7750

Width (cm)	125
Weight (kg)	130
Collector volume (l)	135

Norcar Ab Oy
Fabriksgatan 7
FI-66900 Nykarleby
FINLAND

Tel. +358 (0)6 7812 144
info@norcar.com

We reserve the right to make changes.



norcar

www.norcar.com